



Data sheet KTD22.0-51

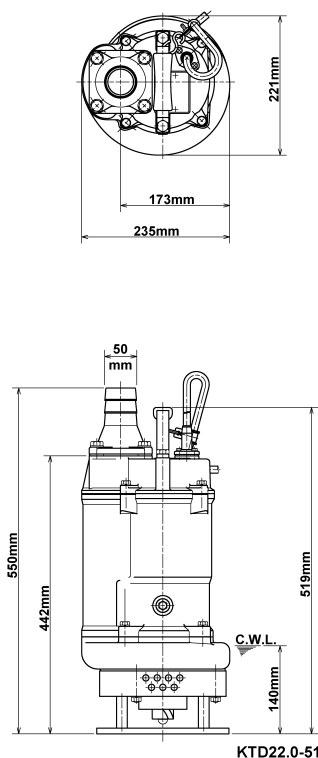

CWL: Continuous running water level

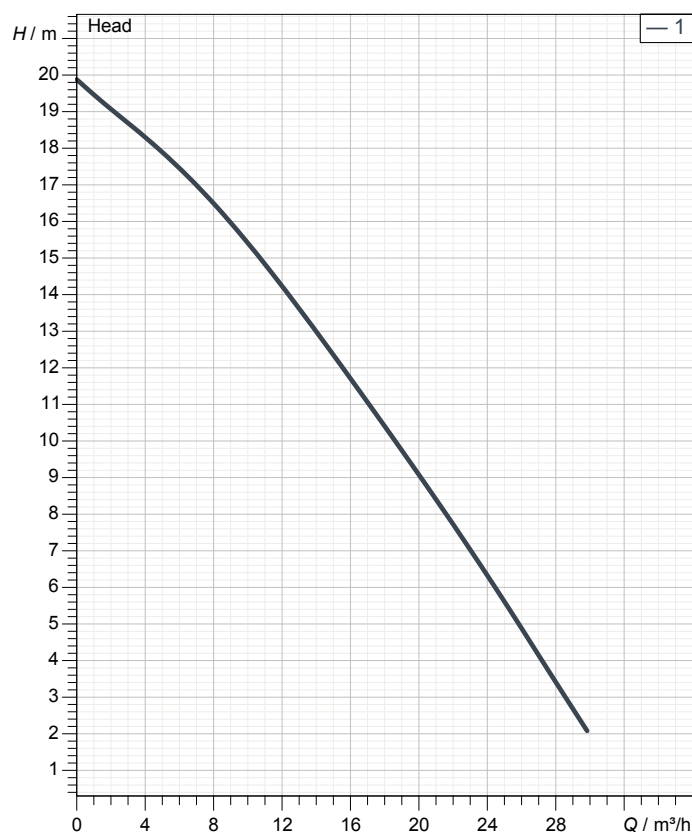

Specification

Electric submersible pump with agitator

Degree of protection IP 68

Pressure resistance max. 25 m

Type of impeller Semi-open

Max. solid handling 10 mm

Suitable for:

spring-/rain-/waste-/ground water, water containing sand

Electric motor

Dry-type submersible induction motor

Insulation class F 2Poles 2840 1/min

Starting mode Direct starting

Rated voltage 400 V 50 Hz 3~

Power uptake 2,53 kW

Rated power 2,00 kW

Rated current 4,5 A

Start current 34,0 A

Cable

20m NSSHÖU 4Cx1,5mm²

Motor Protection

Circle thermal protector

(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device

Primary seal

Silicon carbide on silicon carbide

Secondary seal

Silicon carbide on silicon carbide

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller	Chromium Iron HiCrFC
Agitator	FCD700 (EN-GJS-700-2)
Pump casing	FC200 (EN-GJL-200)
Suction cover	FCD50 (EN-GJS-500-7)
Motor Frame	FC150 (EN-GJL-150)
Shaft	SUS420J2 (EN-X30Cr13)

Discharge size

2" (50mm) Hose Coupling / BS-Coupling (optional)


Weight

38 kg (dry weight of the pump only without cable)

Performance curve



KTD22.0-51

Discharge port	2"
Head	19,9 m
Flow	29,8 m³/h
Rated power	2,00 kW
Power input	2,53 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	4,5 A
Starting current	33,98 A
Number of poles	2
Speed	2840 1/min
Starting mode	Direct starting
Insulation class	F

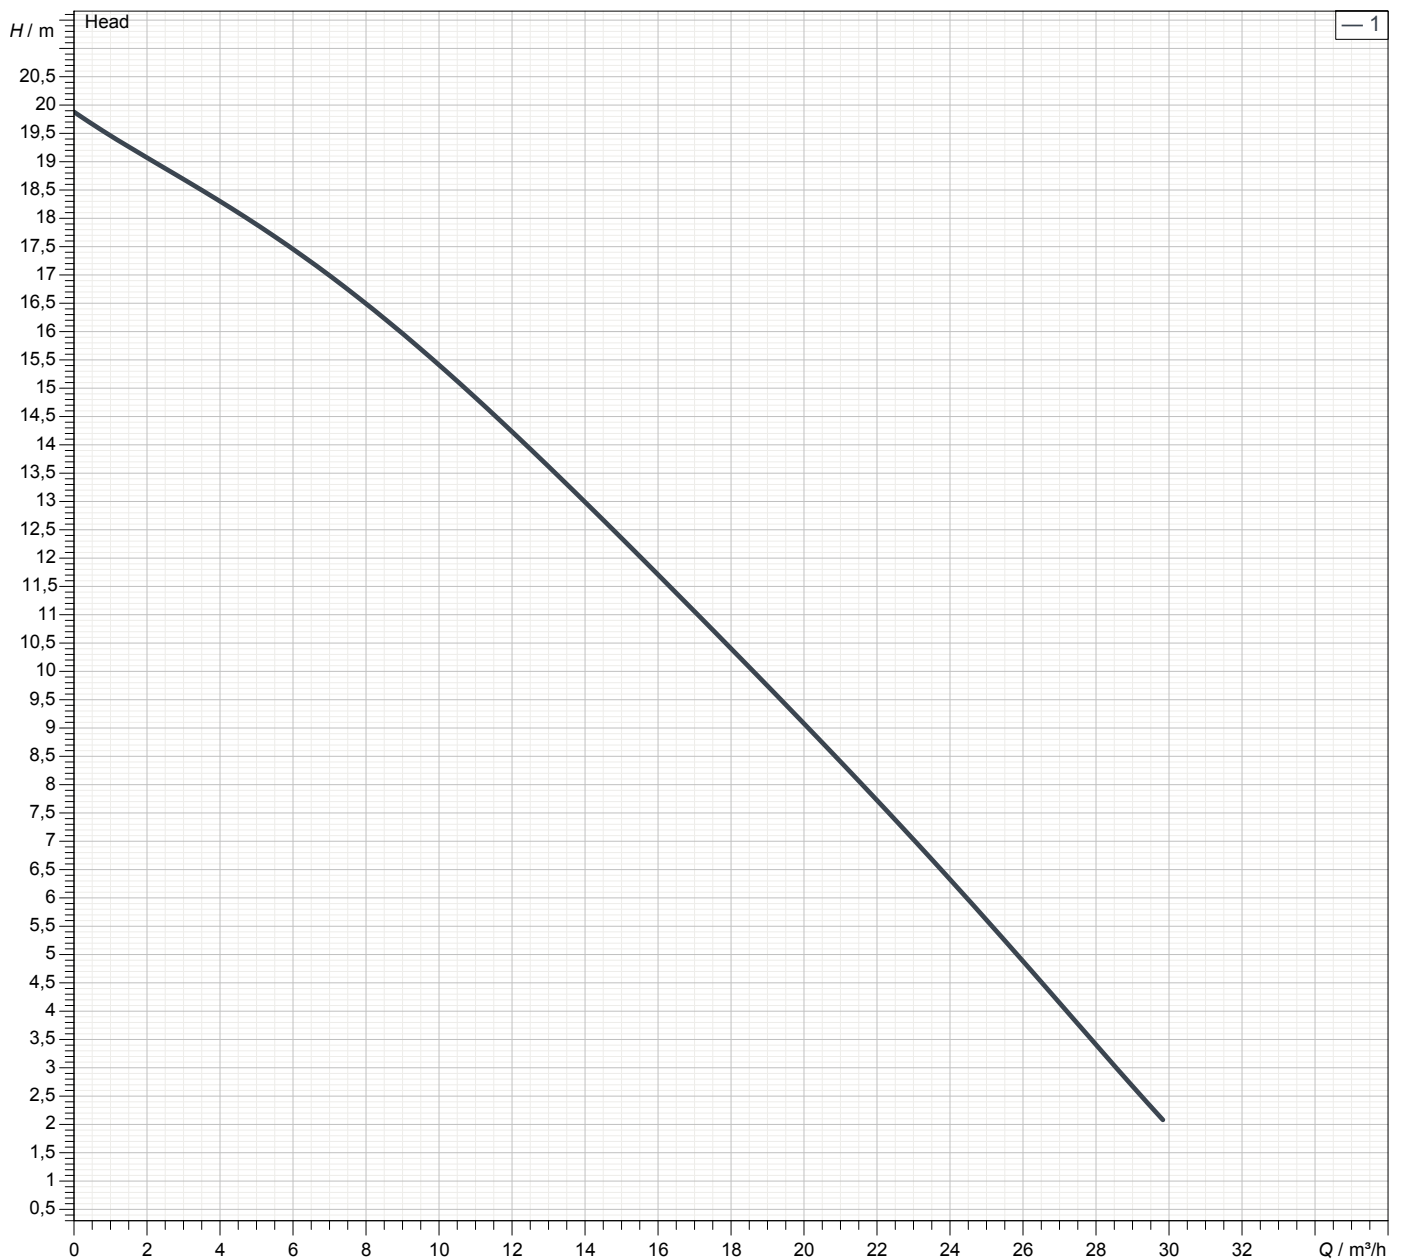

Dimensions

KTD22.0-51

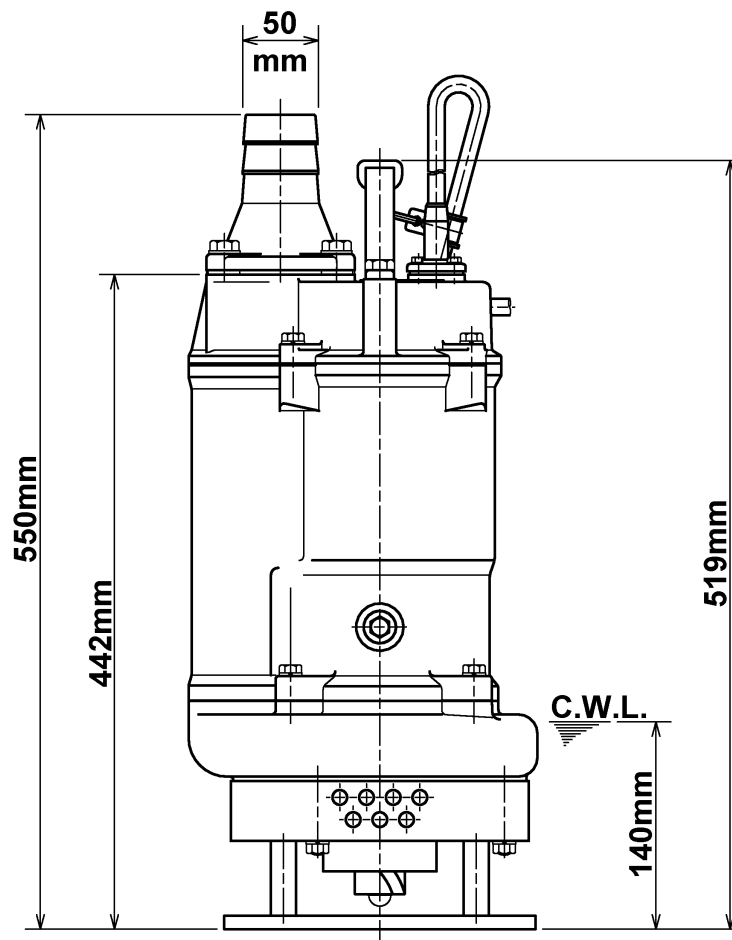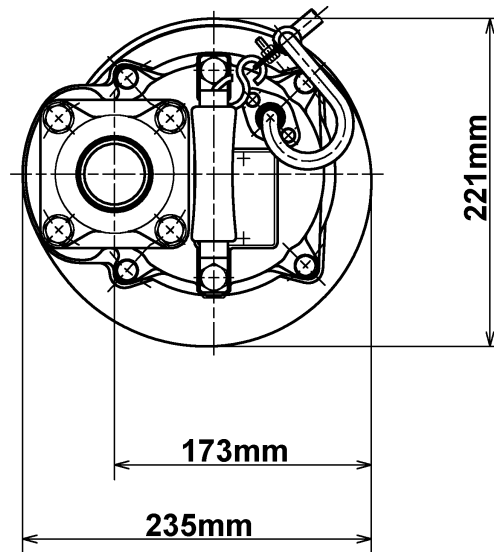

KTD22.0-51

CWL: Continuous running water level
LWL: Lowest running water level


TSURUMI PUMP

Tsurumi Europe GmbH
24.12.2016 V.20 / 1.11.2017

Wahlerstr. 10 * 40472 Düsseldorf * Germany
Tel.: +49-211-4179373 sales@tsurumi.eu
Fax: +49-211-417937-480 www.tsurumi.eu

Sectional drawing

KTD22.0-51

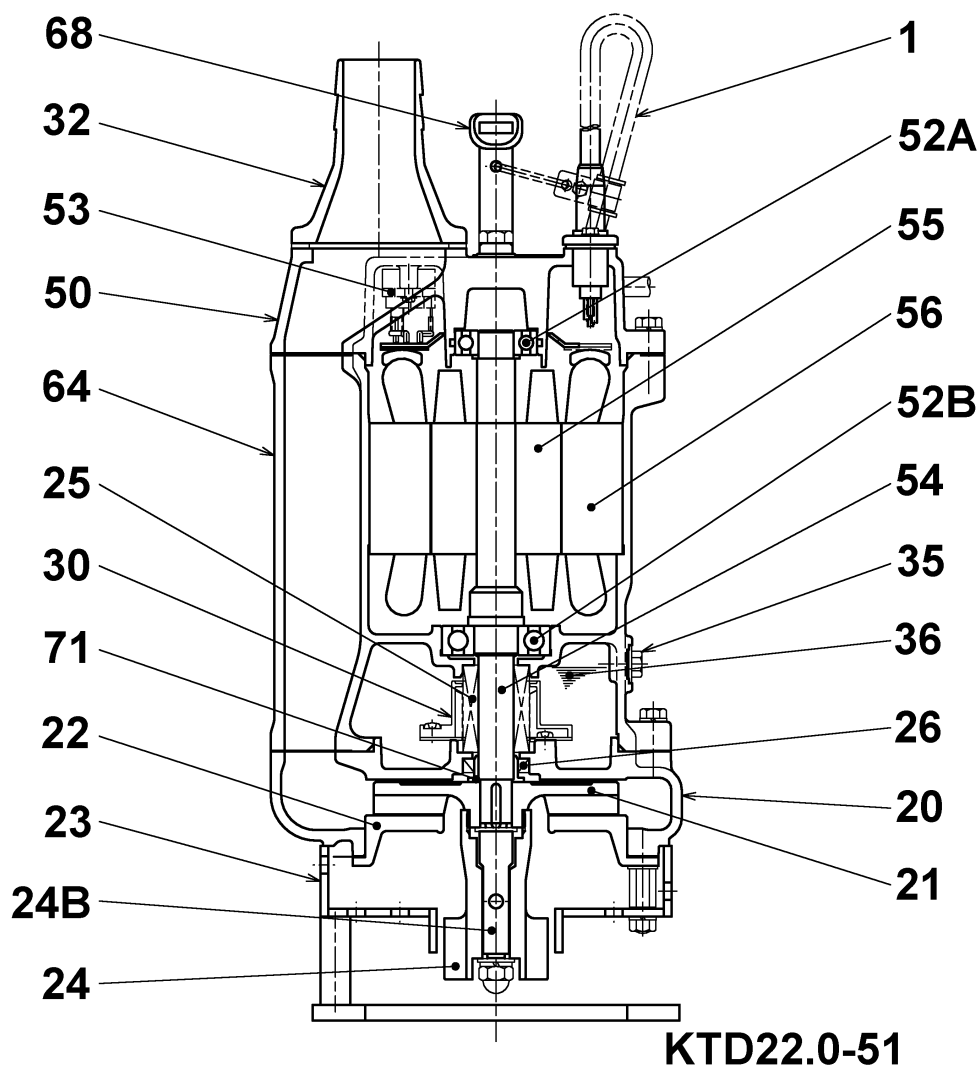

No.	Description	Remark	No.	Description	Remark
1	Cable	20m NSSHÖU	53	Motor Protector 380/400/415V-50Hz.KA314-HRXL00 (H.C)	
20	Pump casing	FC200 (EN-GJL-200)	54	Shaft	SUS420J2 (EN-X30Cr13)
21	Impeller	Chromium Iron HiCrFC	55	Rotor	.
22	Suction cover	FCD50 (EN-GJS-500-7)	56	Stator	.
23	Strainer	Steel plate	64	Motor Frame	FC150 (EN-GJL-150)
24	Agitator	FCD700 (EN-GJS-700-2)	68	Handle	Steelplate and rubber
24B	Connection rod	Black malleable cast iron	71	Shaft protection sleeve	SUS304 (EN-X5CrNi18-10)
25	Mechanical seal	H-20T			
26	Oil seal	TC25388			
30	Oil distributor	Plastic			
32	Discharge coupling	Aluminium alloy casting			
35	Oil screw	SUS304 (EN-X5CrNi18-10)			
36	Lubricant	Turbine oil (ISO VG32)			
50	Main cover	FC150 (EN-GJL-150)			
52A	Upper bearing	6204ZZC3			
52B	Lower bearing	6305ZZC3			